



Power. Performance. Convenience.
...with amazing Tiller Handle control and comfort.



All New

15hp ProKicker FourStroke

- EFI delivers fast, reliable starting and controlled throttle response in all weather
- Superior torque provides greater acceleration for better boat control
- High-thrust four-blade propeller delivers greater trolling speed authority
- Standard power tilt enables fast and effortless operation
- Exclusive centering straps automatically straighten and lock outboard when tilted up
- New and exclusive tiller handle is longer and adjustable for port or starboard installation



Learn more at mercurymarine.com/FourStroke


The *ultimate boating experience* comes standard on the new Mercury 15hp ProKicker outboard.

Mercury's all-new 15hp EFI ProKicker FourStroke is designed and built to improve every aspect of your time on the water, from starting the engine to changing the oil and everything in between.



ALL NEW TILLER HANDLE


- Forward-mounted shift lever for easy access
- Throttle-grip-mounted stop button provides quick shutdown
- Throttle friction helps hold trolling speed
- Power tilt button is forward-mounted for easy reach
- Longer tiller handle (22.75 inches, 58 cm) is easier to reach and operate

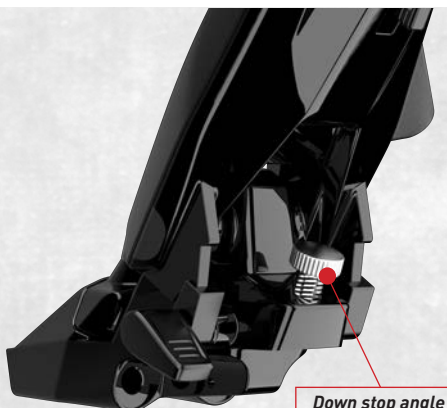

Down stop angle adjustment

COMFORT

Tiller vertical angle locks at 73 and 45 degrees for easy access and secure high-speed running.

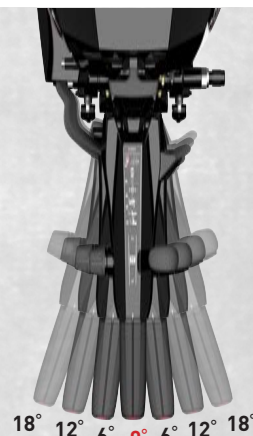

ADJUSTABLE POSITION

Tiller is adjustable 18 degrees port and starboard from center, enabling installation on port or starboard side of the transom.

PERFORMANCE

- EFI system for fast and reliable starting
- High-thrust four-blade propeller for better troll control
- 9 Amp alternator delivers more charging at trolling speeds
- Lightweight
- Power tilt is standard
- Centering straps automatically straighten and lock outboard when tilted up

MAINTENANCE

- Maintenance schedule decal under the cowl
- Quick and easy no-mess engine oil and filter change
- Easy access to in-line water-separating fuel filter
- Convenient freshwater flush system
- Lash-for-life maintenance-free valve train

Specifications

	15HP
HP/kW @ Prop	15/11.1
Max RPM (WOT)	5,700 - 6,200
Cylinder/Configuration	I-2
Displacement (cc)	333cc / 20.3cid
Fuel System	EFI
Alternator Amp/Watt	12/145 electric
Starting	Electric w/manual backup
Gear Ratio	2.15:1
Propeller	7P 4-Blade
Steering	Tiller or Remote
Trim Positions	Power Tilt
SmartCraft Technology	No
Operator Warning System	Engine Guardian
Shaft Length (in)	20/25
Shaft Length (mm)	508/635
Dry Weight (lbs/kgs)	122/56

* Dry Weight: Lightest Version model, excludes engine oil, rigging, hardware.

